

PORTABLE LCD MICROSCOPE

User Manual -(G1200)



Main parameters:

- 1: Pixel: HD 12 megapixel**
- 2: Display screen: 7-inch HD LCD display.**
- 3: Magnification: 1-1200 X continuous amplification system.**
- 4: Distance between object : 10MM to infinity (different distances correspond to different multiples)**
- 5: Plug-in or built-in ultra---lithium battery.**
- 6: Sixteen language systems: English, Spanish, Russian, Korean, Japanese, Thai, Hebrew, Portugal, German, French, Italy, Turkey, Czech, Poland, Traditional Chinese, Simplified Chinese.**

Significant improvements:

Advantage 1:

Vertical microscopes have an important drawback because they are used in many applications such as solder on PCB, model designation of some tiny chips, and metals, and it is easy to lose sight of the details of the objects due to reflection.

Our product specifically addresses this issue. It is an angle-adjustable digital microscope that solves the problem of high reflection. It's a great experience in the electronics maintenance industry, and it's important to note that. This machine has a longer range than the others because it has certain amount of room to operate. It is very convenient to use tweezers, electric soldering iron and others under your microscope




Advantage 2:

Most other microscopes are two-gear magnification, either too large or too small. There will always be visual regret.



This is a digital microscope with continuous zoom and zoom, and it has a wide range of viewing options compared to other microscopes, ranging from 1 to 1200 times magnification, and always finding a suitable multiple for you to.



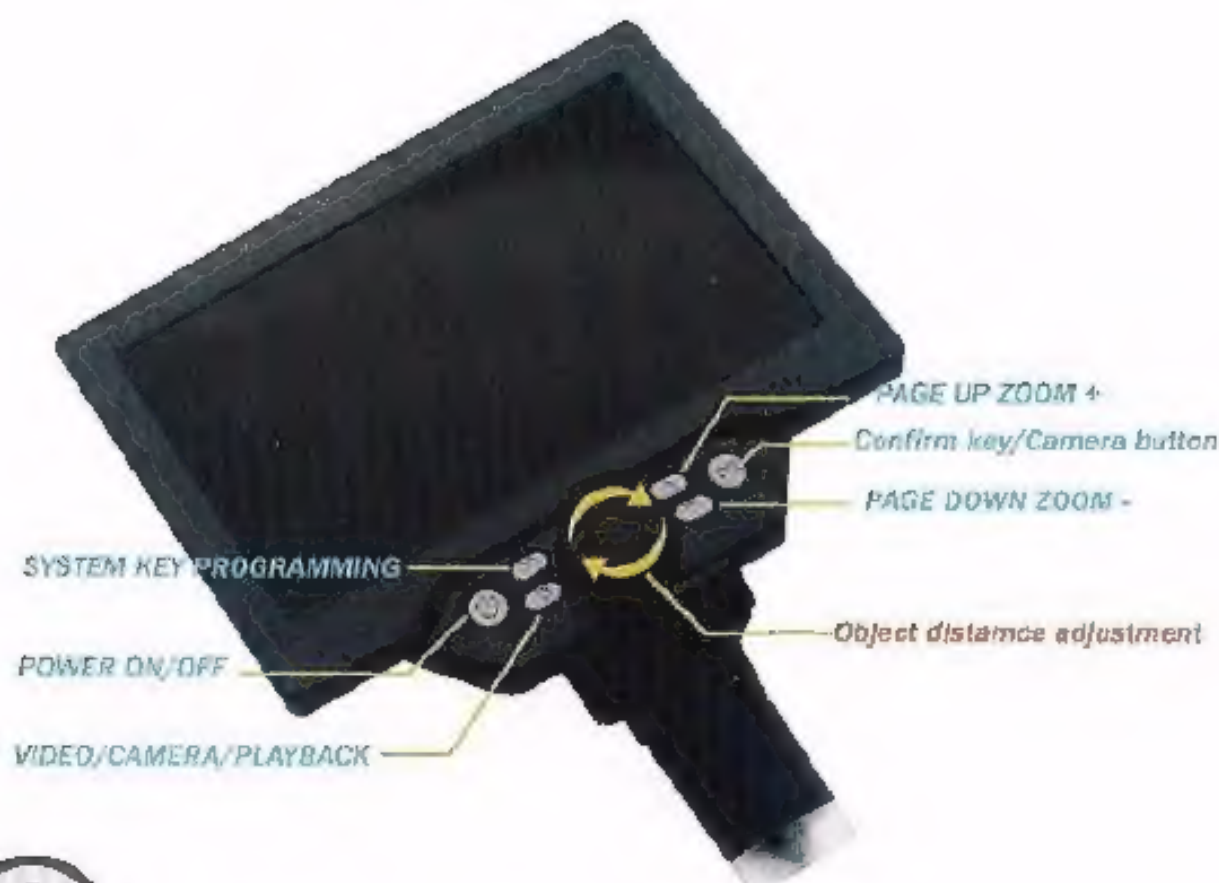

: **Power**

Press 2 seconds to turn on/off

key: Function setting

Screen saver:

Off \ 30 secretary \ 1 min \ 2 min (optional)

Automatic shutdown:

Off. 3 minutes. 5 minutes. 10 minutes

Hz light source: 50 Hz \ 60 Hz

Language options: 16 Languages

Date adjustment:

year, month, day | hour, minute, second

Format: YES/NO

Default: YES/NO

V.1.0 version No:

ersion: H69G-V1.0-20190824

In video mode:

Resolution: 1080FHD, 720P, VGA

**Circulating camera: Off/3 minutes/
5 minutes/10 minutes. When the flash
memory card is full, the foremost video
data will be deleted and the video will
be saved.**

**HDR high dynamic range: On/Off
(When power on, the video recording
function will be turned on automatically
if any object moves under the lens
without manual operation.)**

Exposure compensation:

7 grades for option

**Date Label: Display/Close-Date and
Time can be selected on the screen**

In Photo mode:

Photograph delay:

Single. 2 seconds. 5 seconds. 10 seconds.

Photo pixels:

1.3 M \ 2 M \ 5 M \ 8 M \ 10 M \ 12 M

Continuous shooting:

3 consecutive shots

Photo quality:

Quality \ Standard \ Compression

Sharpness: Strong \ Standard \ Soft

Color:

Nothingness \ Black and White \ Nostalgia

ISO: Automatic \ 100 \ 200 \ 400

Exposure compensation:

7 grades for option

Photo assist: Anti-hand shock on/off

Date label: On/Off

Storage space:

Watch: Up \ Down Delete Protection

key: Mode Keys:

Switch:

**Camera mode, camera mode,
playback mode:**



Up, Down, OK

(Photo/Video, ~Touch)

**1: Power supply DC interface
(Micro USB).**


**2: Flash card socket (MicroSD), support
1-128GB. **Class10 + speed****


3: Light brightness regulator.


**4: REST key, system restore. (If the
machine is inoperable, press the key in
this hole with a needle-like sharp object
to restart the machine)**

**5: Highlight 8 LED lamps with a contin-
uous service life of up to 100,000 hours.**

Special Intelligent Angle-adjustable Aluminum Alloy Support

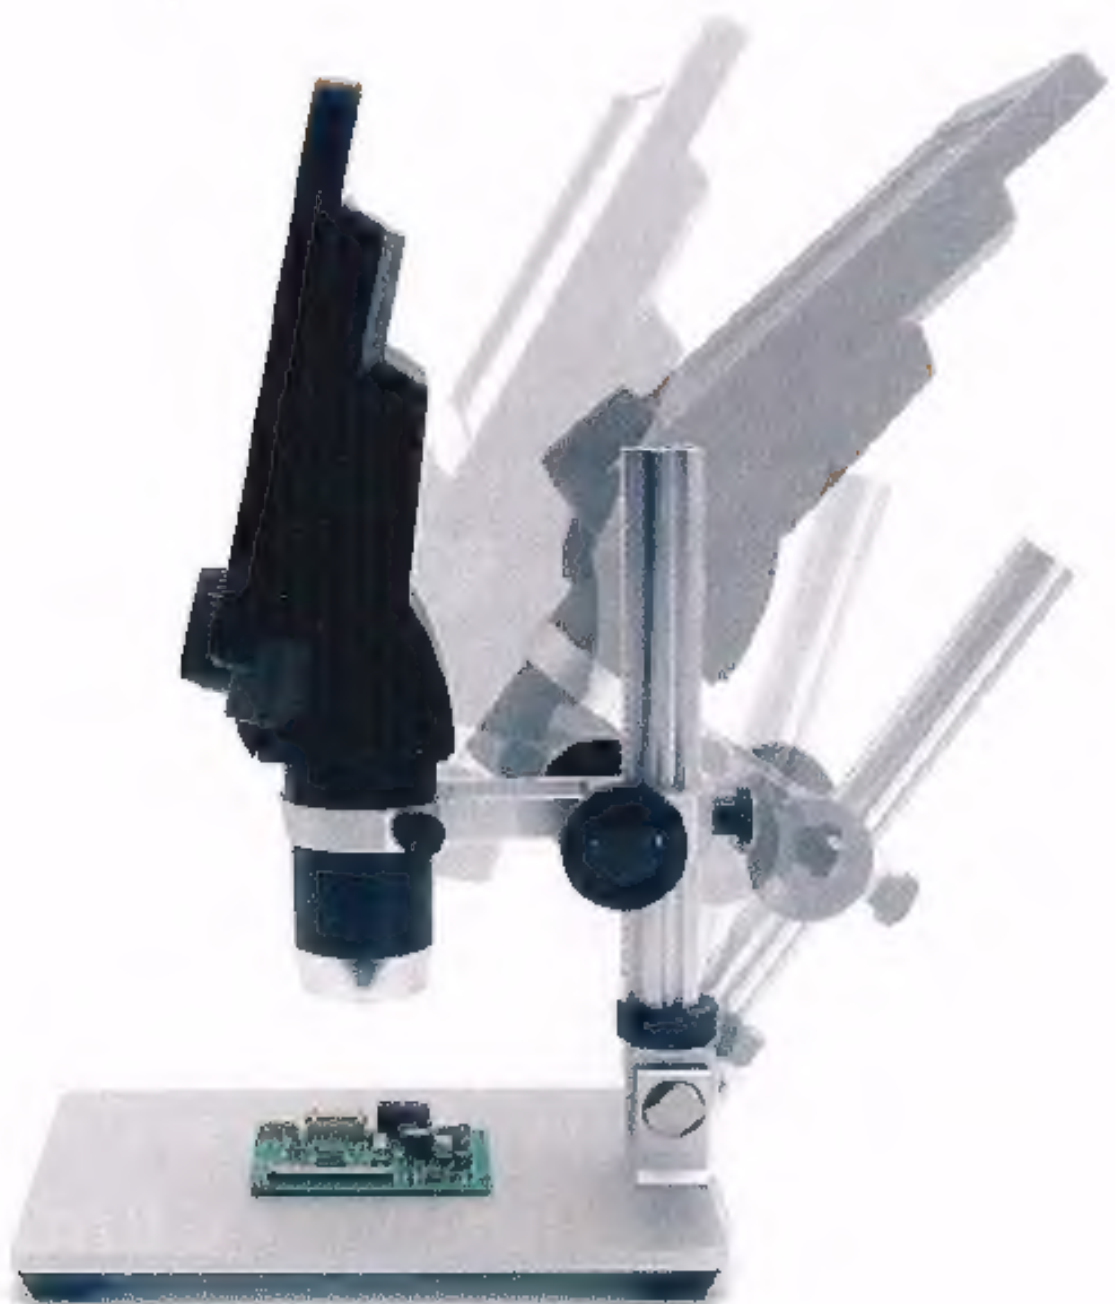

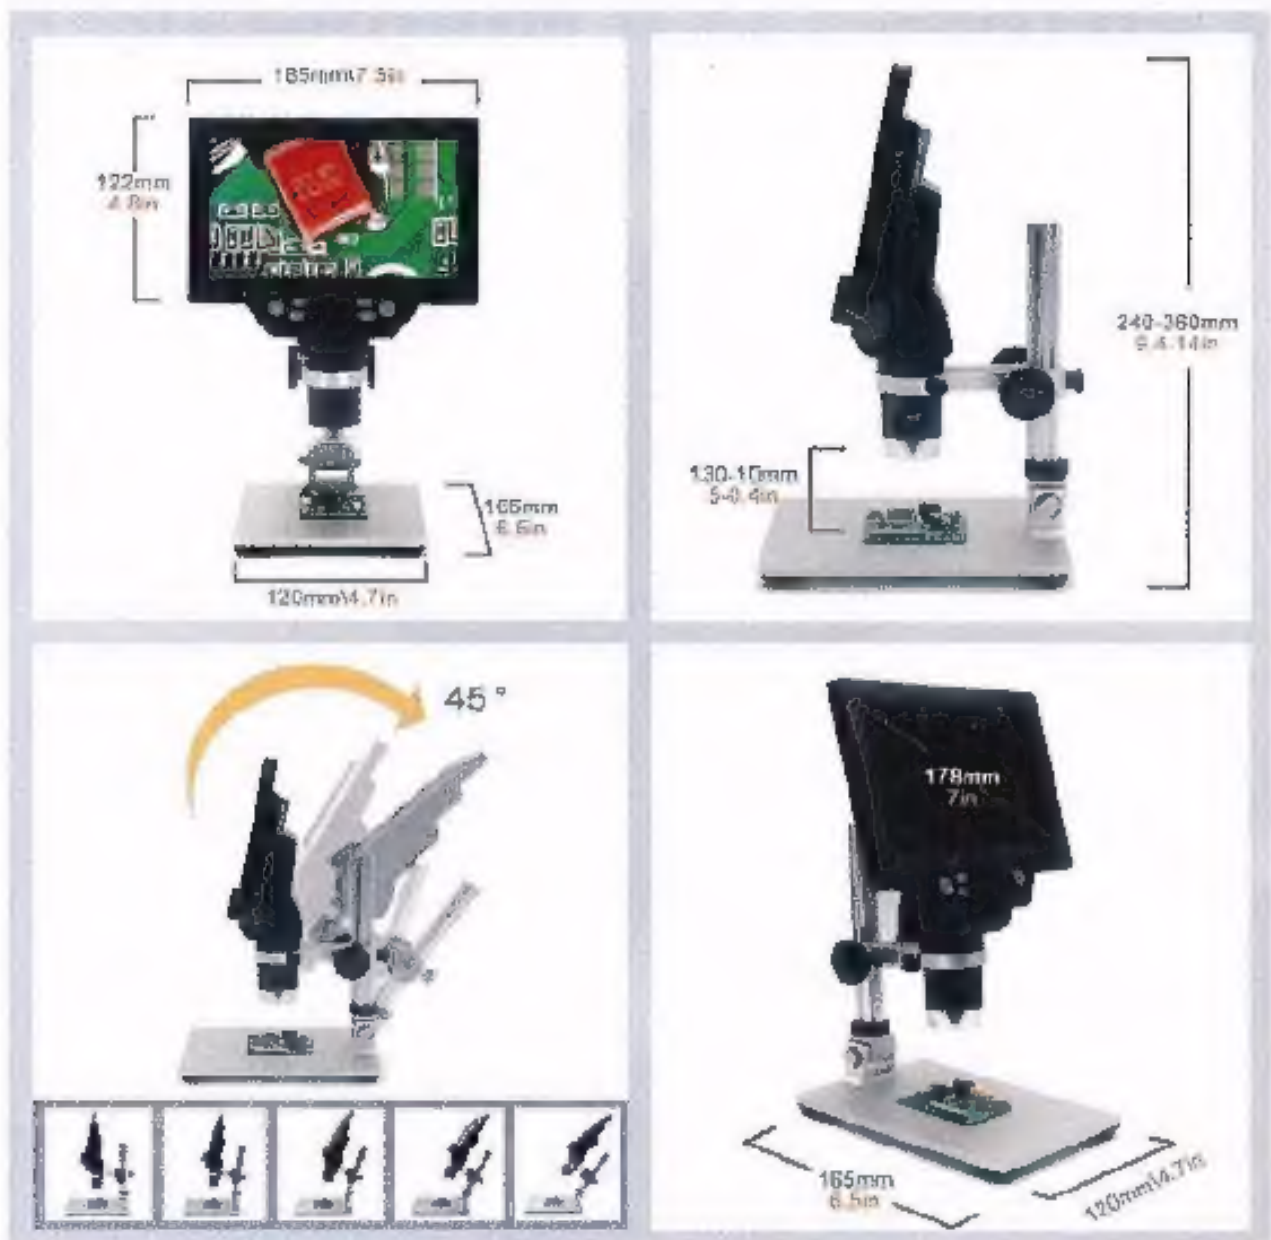



QC inspection

Education purpose inspection



Print industrial

Industrial inspection:PCB Material...

Jewellery & Stamp(Collections)

Textile industrial

Biological inspection



Made in China



G1200